






## 0246

### SUSPENDED LUMINAIRES



#### WARNING

**ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION**

Our policy is the constant improvement of the product. We reserve the right to modify the characteristics of the equipment without prior notice. Please refer to the website [www.arcluce.it](http://www.arcluce.it) for this and other technical documents continually updated.

All information is presented in good faith. no responsibility may be imputed to us for errors, omissions or incorrect interpretations.

The photographs and drawings are within the limits of the quality of the printed reproduction, not binding and indicative only.

Directive 2002/96/CE (Waste Electrical and Electronic Equipment - WEEE). The crossed out wheeled bin label that this product should not be disposed how the normal household waste stream, but with a separate collection; this in order to prevent potential negative consequences for the environment and the human health. For more details on available collection facilities please contact your local government office or the dealer where you purchased this product.


The safety and the proper functioning of the fitting is guaranteed only respecting the electrical Standards and this mounting instructions; therefore it's necessary to keep them.

Installation should be carried out by a suitable qualified person. Always refer to electrical data on the fixture label.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Only use original ARCLUCE spare parts.



Turn off power before maintenance.





Replace any cracked shield.



Risk group 2 (IEC/TR62778). Do not stare at operating LED. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 2 m is not expected.

## SPECIFICATIONS

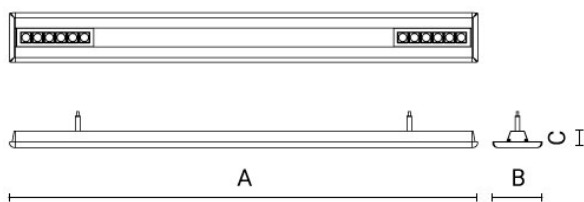

#### MECHANICAL

Dimensions:	A: 1200 mm
	B: 127 mm
	C: 42 mm
Weight:	1.5 Kg
Rated Ta (max Ta):	-20°C ÷ +25°C (45°C)

#### ELECTRICAL

Wiring:	ON/OFF, DALI, BLE
Input:	220-240V 50/60Hz

## INSTALLATION

1. Slide suspension wire through bracket and install it on the supporting surface using appropriate screws and dowels (by others).
2. Wire the fixture according to diagram.
3. Secure the cable cup to the bracket.

**1**

Turn off power.

Use only screws and dowels suitable for the mounting surface (by others).

**2**

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

**A** ON/OFF

LINE1 - BROWN  
LINE2 - RED  
GROUND - YELLOW/GREEN  
NEUTRAL - BLUE

**B** BLE

LINE - BROWN  
GROUND - YELLOW/GREEN  
NEUTRAL - BLUE

**C** DALI

DA  
LINE - BROWN  
GROUND - YELLOW/GREEN  
NEUTRAL - BLUE  
DA

**3**

Do not pinch or damage the cable.