




0573

WALL RECESSED

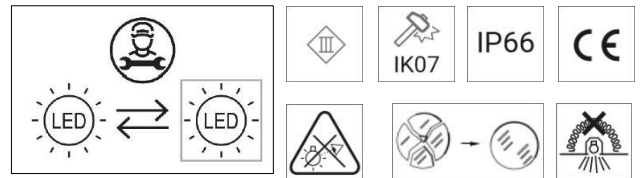

WARNING

ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION

Our policy is the constant improvement of the product. We reserve the right to modify the characteristics of the equipment without prior notice. Please refer to the website www.arcluce.it for this and other technical documents continually updated.

All information is presented in good faith. no responsibility may be imputed to us for errors, omissions or incorrect interpretations.

The photographs and drawings are within the limits of the quality of the printed reproduction, not binding and indicative only.



Directive 2002/96/CE (Waste Electrical and Electronic Equipment - WEEE). The crossed out wheeled bin label that this product should not be disposed how the normal household waste stream, but with a separate collection; this in order to prevent potential negative consequences for the environment and the human health. For more details on available collection facilities please contact your local government office or the dealer where you purchased this product.


The safety and the proper functioning of the fitting is guaranteed only respecting the electrical Standards and these mounting instructions; therefore it's necessary to keep them.

Installation should be carried out by a suitable qualified person. Always refer to electrical data on the fixture label.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Only use original ARCLUCE spare parts.



Turn off power before maintenance.



Replace any cracked shield.




Risk group 2 (IEC/TR62778). Do not stare at operating LED.



Luminaires not suitable for covering with thermally insulating material.

SPECIFICATIONS

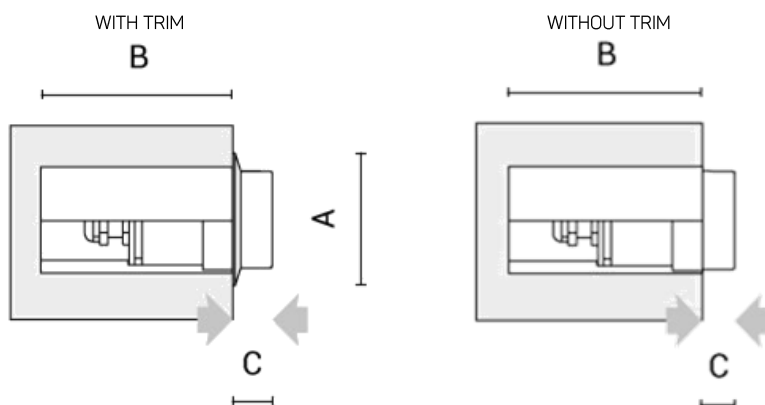

MECHANICAL


Dimensions:	With trim - A: Ø 50 mm Without trim - A: Ø 70 mm B: 100 mm C: 20 mm
Weight:	0.3 Kg
Rated Ta:	-20°C ÷ +25°C

ELECTRICAL

Wiring:	REM-D
Input:	24Vdc



REM-D versions: This is a constant voltage fixtures. It requires a parallel connection of fixtures to the driver.



ACCESSORIES

1099226X



Thermoplastic material recessed installation box.

1099227X



Thermoplastic material recessed installation box.

1099259X



Junction box IP68.

INSTALLATION

1. Prepare wall with appropriate recessed opening, position recessed box in wall opening paying and pour concrete.
2. Wire the fixture according to the diagram.
3. Install the fixture in the recessed box.

1

Standard recessed housing supplied with fixture

Optional recessed housing (code 1099227X)

Secure the recessed box so that it is not displaced during concrete pour operation

Pour concrete up to this edge

2

Turn off power.

+LED - BROWN

-LED - BLUE

REM-D versions: This is a constant voltage fixtures. It requires a parallel connection of fixtures to the driver.

DRIVER

1 2 N

Connect the fixture to the driver before supplying the power.

The cable connection must have an IP rating at least equal or higher than the fixture itself.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

3

Do not pinch or damage the cable.

Data di emissione: 2016.09.28

Stato di modifica: M3

Codice: 6557311.11